

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number  
WO 2005/085536 A1

(51) International Patent Classification<sup>7</sup>: E02D 29/14,  
E01C 23/088

KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/US2004/004617

(22) International Filing Date: 17 February 2004 (17.02.2004) (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant and

(72) Inventor: DAVIS, Richard, B. [US/US]; 897 23 Road, Grand Junction, CO 81505 (US).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report  
— with amended claims and statement

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SETTING UTILITY ACCESS COVERS

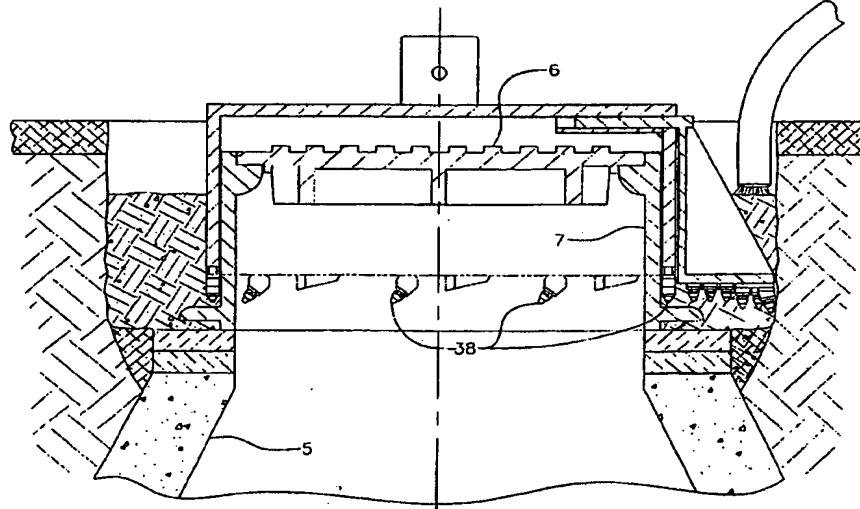

(57) Abstract: Apparatus and method of setting access covers to grade wherein the apparatus includes rubblizing bits and a vacuum, the first rubblizing bit having a central core with attached carriers for teeth to grind the underlying material into small pieces, a second rubblizing bit to rubblize below the ring of the access, a third bit for trimming a step for a T-lock, and a fourth bit for milling around an access ring for resurfacing and the steps of rubblizing down to the area of the bottom of the ring and sucking out the material by vacuum, setting the height of the ring and cover, trimming a step for a T-lock, and milling around the ring and cover a selected distance.

WO 2005/085536 A1